

VIBRATING HOPPER

SORTING, DRAINING AND REGULATING



THE SOLUTION FOR AUTOMATED SORTING

The vibrating hopper consists of:

- ▶ A stainless steel chassis with braked castors and rubber wheels.
- ▶ A vibrating hopper.
- ▶ A removable stainless steel grid with an opening of 3, 5 or 7 mm. The operator can therefore modify the machine according to the application for which it is intended or the type of harvest to be processed in less than 2 minutes, thanks to the locking toggles.
- ▶ A removable bin that collects juices and solid particles by separating them through a stainless steel grid.

Interchangeable grids for customised sorting

The **3 mm grid opening** allows for juice separation, so that only juice and small debris pass through to the bin.

The **5 mm grid opening** removes fine particles, such as leaf debris burnt by thermal leaf removers. It also removes verjuice, dry grapes and stems.

A VIBRATING HOPPER WITH A VARIETY OF FUNCTIONS

- ▶ The hopper spreads the harvest across the entire width of a sorting table.
- ▶ It separates and isolates the freed juices.
- ▶ It removes small particles (dry grapes, verjuice, stems).

OPTIONAL EQUIPMENT


1 Output chute

2 Additional stainless steel grid.

- ▶ Available in 3 mm, 5 mm and 7 mm openings.

3 Helical waste evacuation on the drip trough

- ▶ Flexible worm screw with geared motor and electrical connection.
- ▶ Perforated and microblasted stainless steel trough.

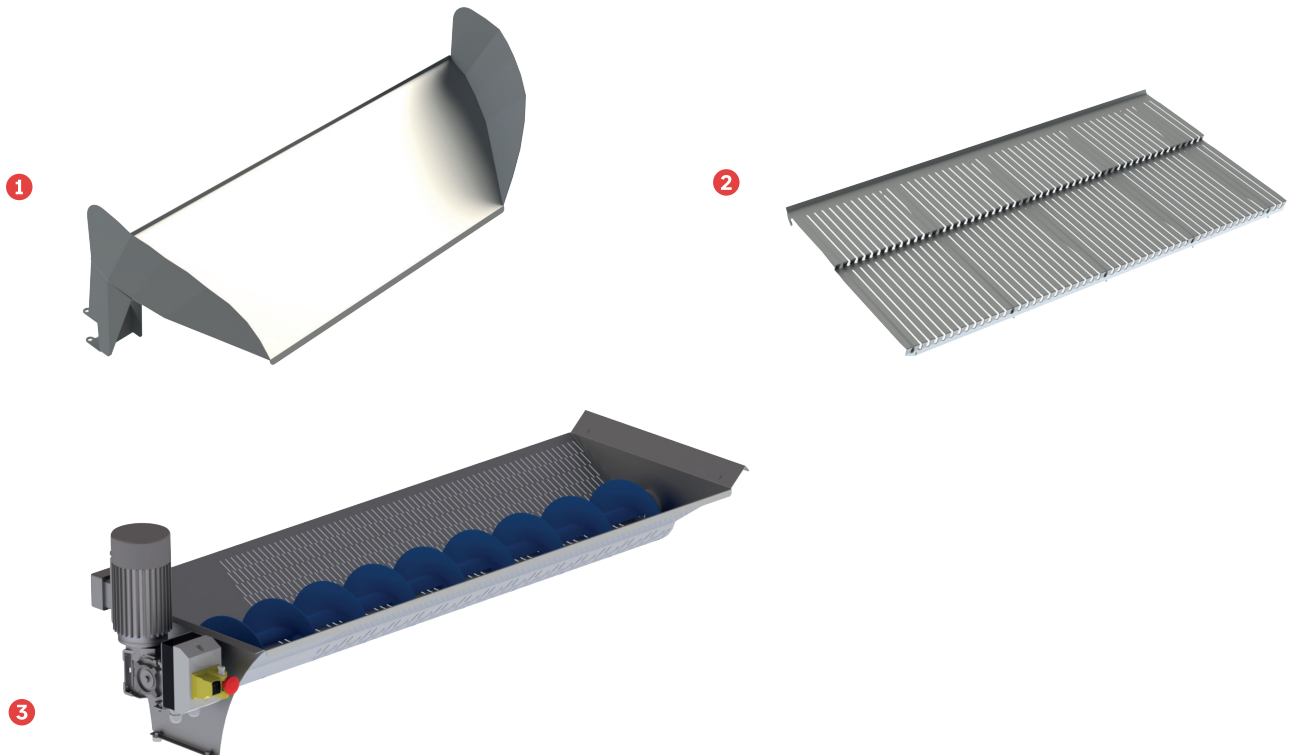

SOCMA®

ZA du Castellas
599, avenue du Col de Chèvre
11100 Montredon-des-Corbières

+33 (0)4 68 41 50 30
socma@socma.info
socma.info